

Express Mail Label No. EM432436994US

STANT COMMISSIONER FOR PATENTS  
ington, D.C. 20231

Mr Sir:

Transmitted herewith for filing is the patent application of

**Inventor(s): Yasuo Yoshioka and Xavier Serra**

For: **CONVERTING APPARATUS OF VOICE SIGNAL BY MODULATION OF FREQUENCIES AND AMPLITUDES OF SINUSOIDAL WAVE COMPONENTS**

Enclosed are:

- ☒ 6 Sheet(s) of drawings ( \_\_\_ informal)  
☒ An assignment of the invention to Yamaha Corporation.  
☐ An associate power of attorney.  
☐ A verified statement to establish small entity status under 37 CFR 1.9 and 1.27.  
☒ Declaration and Power of Attorney.  
☒ Certified copy of Japan Patent Application No. 9-296050 filed October 28, 1997 from which priority is claimed under 35 USC §119.  
☒ IDS enclosed. 1 with references.  
Preliminary Amendment

| CALCULATION OF FEES |  |                                    |                            |  |           |         |
|---------------------|--|------------------------------------|----------------------------|--|-----------|---------|
| ITEM                |  | NO. OF CLAIMS FILED<br>MINUS BASE* | NO. OF CLAIMS<br>OVER BASE | X SM/LG<br>ENTITY<br>FEE                             | \$ AMOUNT | \$ FEE  |
| A                   | TOTAL CLAIMS FEE   | 27                      - 20* =    | 7                          | X \$11 or<br>X \$22                                  | \$154     |         |
| B                   | INDEPENDENT CLAIMS<br>FEE**  | 6                         - 3* =   | 3                          | X \$41 or<br>X 82                                    | \$246     |         |
| C                   | SUBTOTAL - ADDITIONAL CLAIMS FEE (ADD FINAL COLUMN IN LINES A + B) |                                    |                            |  |           | \$400   |
| D                   | MULTIPLE-DEPENDENT CLAIMS FEE                                      |                                    |                            | SMALL ENTITY FEE = \$135<br>LARGE ENTITY FEE = \$270 |           | \$      |
| E                   | BASIC FEE*   |                                    |                            | SMALL ENTITY FEE = \$395<br>LARGE ENTITY FEE = \$790 |           | \$790   |
| F                   | TOTAL FILING FEE (ADD TOTALS FOR LINES C, D, AND E)                |                                    |                            |  |           | \$1,190 |
| F                   | ASSIGNMENT RECORDING FEE   |                                    |                            |  | \$ 40     | \$40    |
|                     | **LIST INDEPENDENT CLAIMS  |                                    |                            |  |           |         |

Please charge my Deposit Account No. 16-1805 the amount of \$0

**A copy of this letter is enclosed.**

X A check in the amount of \$1,190

to cover the filing fee is enclosed.

X A check in the amount of \$40

to cover Assignment  
Recordation fee is enclosed.

X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-1805.

X Any additional filing fees required under 37 CFR 1.16.

X Any patent application processing fees under 37 CFR 1.17.

— The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-1805.

Any patent application processing fees under 37 CFR 1.17.

— The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

Roger R. Wise

Roger R. Wise

Reg. No. 31,204

Date: October 27, 1998

PILLSBURY MADISON & SUTRO LLP

725 South Figueroa Street, Suite 1200

Los Angeles, CA 90017-5443

Telephone: (213) 488-7100

**Facsimile: (213) 629-1033**

122  
 123  
 124  
 125  
 126  
 127  
 128  
 129  
 130  
 131  
 132  
 133  
 134  
 135  
 136  
 137  
 138  
 139  
 140  
 141  
 142  
 143  
 144  
 145  
 146  
 147  
 148  
 149  
 150  
 151  
 152  
 153  
 154  
 155  
 156  
 157  
 158  
 159  
 160  
 161  
 162  
 163  
 164  
 165  
 166  
 167  
 168  
 169  
 170  
 171  
 172  
 173  
 174  
 175  
 176  
 177  
 178  
 179  
 180  
 181  
 182  
 183  
 184  
 185  
 186  
 187  
 188  
 189  
 190  
 191  
 192  
 193  
 194  
 195  
 196  
 197  
 198  
 199  
 200  
 201  
 202  
 203  
 204  
 205  
 206  
 207  
 208  
 209  
 210  
 211  
 212  
 213  
 214  
 215  
 216  
 217  
 218  
 219  
 220  
 221  
 222  
 223  
 224  
 225  
 226  
 227  
 228  
 229  
 230  
 231  
 232  
 233  
 234  
 235  
 236  
 237  
 238  
 239  
 240  
 241  
 242  
 243  
 244  
 245  
 246  
 247  
 248  
 249  
 250  
 251  
 252  
 253  
 254  
 255  
 256  
 257  
 258  
 259  
 260  
 261  
 262  
 263  
 264  
 265  
 266  
 267  
 268  
 269  
 270  
 271  
 272  
 273  
 274  
 275  
 276  
 277  
 278  
 279  
 280  
 281  
 282  
 283  
 284  
 285  
 286  
 287  
 288  
 289  
 290  
 291  
 292  
 293  
 294  
 295  
 296  
 297  
 298  
 299  
 300  
 301  
 302  
 303  
 304  
 305  
 306  
 307  
 308  
 309  
 310  
 311  
 312  
 313  
 314  
 315  
 316  
 317  
 318  
 319  
 320  
 321  
 322  
 323  
 324  
 325  
 326  
 327  
 328  
 329  
 330  
 331  
 332  
 333  
 334  
 335  
 336  
 337  
 338  
 339  
 340  
 341  
 342  
 343  
 344  
 345  
 346  
 347  
 348  
 349  
 350  
 351  
 352  
 353  
 354  
 355  
 356  
 357  
 358  
 359  
 360  
 361  
 362  
 363  
 364  
 365  
 366  
 367  
 368  
 369  
 370  
 371  
 372  
 373  
 374  
 375  
 376  
 377  
 378  
 379  
 380  
 381  
 382  
 383  
 384  
 385  
 386  
 387  
 388  
 389  
 390  
 391  
 392  
 393  
 394  
 395  
 396  
 397  
 398  
 399  
 400  
 401  
 402  
 403  
 404  
 405  
 406  
 407  
 408  
 409  
 410  
 411  
 412  
 413  
 414  
 415  
 416  
 417  
 418  
 419  
 420  
 421  
 422  
 423  
 424  
 425  
 426  
 427  
 428  
 429  
 430  
 431  
 432  
 433  
 434  
 435  
 436  
 437  
 438  
 439  
 440  
 441  
 442  
 443  
 444  
 445  
 446  
 447  
 448  
 449  
 450  
 451  
 452  
 453  
 454  
 455  
 456  
 457  
 458  
 459  
 460  
 461  
 462  
 463  
 464  
 465  
 466  
 467  
 468  
 469  
 470  
 471  
 472  
 473  
 474  
 475  
 476  
 477  
 478  
 479  
 480  
 481  
 482  
 483  
 484  
 485  
 486  
 487  
 488  
 489  
 490  
 491  
 492  
 493  
 494  
 495  
 496  
 497  
 498  
 499  
 500  
 501  
 502  
 503  
 504  
 505  
 506  
 507  
 508  
 509  
 510  
 511  
 512  
 513  
 514  
 515  
 516  
 517  
 518  
 519  
 520  
 521  
 522  
 523  
 524  
 525  
 526  
 527  
 528  
 529  
 530  
 531  
 532  
 533  
 534  
 535  
 536  
 537  
 538  
 539  
 540  
 541  
 542  
 543  
 544  
 545  
 546  
 547  
 548  
 549  
 550  
 551  
 552  
 553  
 554  
 555  
 556  
 557  
 558  
 559  
 560  
 561  
 562  
 563  
 564  
 565  
 566  
 567  
 568  
 569  
 570  
 571  
 572  
 573  
 574  
 575  
 576  
 577  
 578  
 579  
 580  
 581  
 582  
 583  
 584  
 585  
 586  
 587  
 588  
 589  
 590  
 591  
 592  
 593  
 594  
 595  
 596  
 597  
 598  
 599  
 600  
 601  
 602  
 603  
 604  
 605  
 606  
 607  
 608  
 609  
 610  
 611  
 612  
 613  
 614  
 615  
 616  
 617  
 618  
 619  
 620  
 621  
 622  
 623  
 624  
 625  
 626  
 627  
 628  
 629  
 630  
 631  
 632  
 633

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: )  
Yasuo Yoshioka, et al. ) Art Unit: Unknown  
Serial No: Unknown ) Examiner: Unknown  
Filed: October 27, 1998 )  
For: CONVERTING APPARATUS OF VOICE )  
SIGNAL BY MODULATION OF )  
FREQUENCIES AND AMPLITUDES OF )  
SINUSOIDAL WAVE COMPONENTS )  
\_\_\_\_\_ )

CERTIFICATE OF MAILING VIA U.S. EXPRESS MAIL

"Express Mail" Mailing Label No. EM432436994US

Date of Deposit: October 27, 1998

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

I hereby certify that

- ☒ Letter of transmittal
- ☒ check in amount of \$1190 as filing fee
- ☒ patent application (33 pages of specification; 27 claims; 1 pages of abstract
- ☒ 6 sheet(s) of formal drawings
- ☒ executed Declaration and Power of Attorney
- ☒ executed Assignment, with Recordation Cover Letter and check in amount of \$40
- ☒ 1 certified copy(ies) of Japan patent application(s) from which priority is claimed in the subject case pursuant to 35 USC § 119
- ☒ Information Disclosure Statement with 1 references
- ☒ return postcard

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service with sufficient postage under 37 CFR 1.10 on the date indicated above and are addressed to:


Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231.

October 27, 1998

Date of Deposit

Danny Vargas

Name of person mailing papers

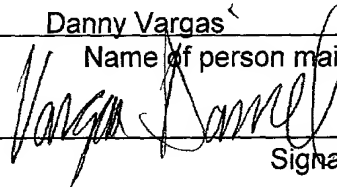

Signature

# CONVERTING APPARATUS OF VOICE SIGNAL BY MODULATION OF FREQUENCIES AND AMPLITUDES OF SINUSOIDAL WAVE COMPONENTS

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The present invention relates to a voice converter which causes a processed voice to imitate a further voice forming a target.

### 2. Description of the Related Art

Various voice converters which change the frequency characteristics, or the like, of an input voice and then output the voice, have been disclosed. For example, there exist karaoke apparatuses which change the pitch of the singing voice of a singer to convert a male voice to a female voice, or vice versa (for example, Publication of a Translation of an International Application No. Hei. 8-508581 and corresponding international publication WO94/22130).

However, in a conventional voice converter, although the voice is converted, this has simply involved changing the voice characteristics. Therefore, it has not been possible to convert the voice such that it approximates someone's voice, for example. Moreover, it would be very amusing if a karaoke machine were provided with an imitating function whereby not only the voice characteristics, but also the manner of singing, could be made to sound like a particular singer. However, in conventional

voice converters, processing of this kind has not been possible.

## SUMMARY OF THE INVENTION

The present invention is devised with the foregoing in view, an object thereof being to provide a voice converter which is capable of making voice characteristics imitate a target voice. It is a further object of the present invention to provide a voice converter which is capable of making an input voice of a singer imitate the singing manner of a desired singer.

In order to resolve the aforementioned problems, according to one aspect, the inventive apparatus is constructed for converting an input voice signal into an output voice signal according to a reference voice signal. The inventive apparatus comprises extracting means for extracting a plurality of sinusoidal wave components from the input voice signal, memory means for memorizing pitch information representative of a pitch of the reference voice signal, modulating means for modulating a frequency of each sinusoidal wave component according to the pitch information retrieved from the memory means, and mixing means for mixing the plurality of the sinusoidal wave components having the modulated frequencies to synthesize the output voice signal having a pitch different from that of the input voice signal and influenced by that of the reference voice signal.

Preferably, the inventive apparatus further comprises control means for setting a control parameter effective to control a degree of modulation of the frequency of each sinusoidal wave component by the modulating means so that a degree of influence of the pitch of the reference voice signal to the pitch

of the output voice signal is determined according to the control parameter.

Preferably, the memory means comprises means for memorizing primary pitch information representative of a discrete pitch matching a music scale, and secondary pitch information representative of a fractional pitch fluctuating relative to the discrete pitch, and the modulating means comprises means for modulating the frequency of each sinusoidal wave component according to both of the primary pitch information and the secondary pitch information.

Preferably, the inventive apparatus further comprises detecting means for detecting a pitch of the input voice signal based on results of extraction of the sinusoidal wave components, and switch means operative when the detecting means does not detect the pitch from the input voice signal for outputting an original of the input voice signal in place of the synthesized output voice signal.

Preferably, the memory means further comprises means for memorizing amplitude information representative of amplitudes of sinusoidal wave components contained in the reference voice signal, and the modulating means further comprises means for modulating an amplitude of each sinusoidal wave component of the input voice signal according to the amplitude information, so that the mixing means mixes the plurality of the sinusoidal wave components having the modulated amplitudes to synthesize the output voice signal having a timbre different from that of the input voice signal and influenced by that of the reference voice signal.

Preferably, the inventive apparatus further comprises means for setting a control parameter effective to control a degree of modulation of the

amplitude of each sinusoidal wave component by the modulating means so that a degree of influence of the timbre of the reference voice signal to the timbre of the output voice signal is determined according to the control parameter.

Preferably, the inventive apparatus further comprises means for memorizing volume information representative of a volume variation of the reference voice signal, and means for varying a volume of the output voice signal according to the volume information so that the output voice signal emulates the volume variation of the reference voice signal.

Preferably, the inventive apparatus further comprises means for separating a residual component from the input voice signal after extraction of the sinusoidal wave components, and means for adding the residual component to the output voice signal.

In another aspect, the inventive apparatus is constructed for converting an input voice signal into an output voice signal according to a reference voice signal. The inventive apparatus comprises extracting means for extracting a plurality of sinusoidal wave components from the input voice signal, memory means for memorizing amplitude information representative of amplitudes of sinusoidal wave components contained in the reference voice signal, modulating means for modulating an amplitude of each sinusoidal wave component extracted from the input voice signal according to the amplitude information retrieved from the memory means, and mixing means for mixing the plurality of the sinusoidal wave components having the modulated amplitudes to synthesize the output voice signal having a timbre different from that of the input voice signal and influenced by that of the reference voice

signal.

Preferably, the inventive apparatus further comprises control means for setting a control parameter effective to control a degree of modulation of the amplitude of each sinusoidal wave component by the modulating means so that a degree of influence of the timbre of the reference voice signal to the timbre of the output voice signal is determined according to the control parameter.

Preferably, the memory means further memorizes pitch information representative of a pitch of the reference voice signal, and the modulating means further modulates a frequency of each sinusoidal wave component of the input voice signal according to the pitch information, so that the mixing means mixes the plurality of the sinusoidal wave components having the modulated frequencies to synthesize the output voice signal having a pitch different from that of the input voice signal and influenced by that of the reference voice signal.

Preferably, the inventive apparatus further comprises means for setting a control parameter effective to control a degree of modulation of the frequency of each sinusoidal wave component by the modulating means so that a degree of influence of the pitch of the reference voice signal to the pitch of the output voice signal is determined according to the control parameter.

Preferably, the memory means comprises means for memorizing primary pitch information representative of a discrete pitch matching a music scale, and secondary pitch information representative of a fractional pitch fluctuating relative to the discrete pitch, and the modulating means comprises means for modulating the frequency of each sinusoidal wave component



according to both of the primary pitch information and the secondary pitch information.

Preferably, the inventive apparatus further comprises detecting means for detecting a pitch of the input voice signal based on results of extraction of the sinusoidal wave components, and switch means operative when the detecting means does not detect the pitch from the input voice signal for outputting an original of the input voice signal in place of the synthesized output voice signal.

Preferably, the inventive apparatus further comprises means for memorizing volume information representative of a volume variation of the reference voice signal, and means for varying a volume of the output voice signal according to the volume information so that the output voice signal emulates the volume variation of the reference voice signal.

Preferably, the inventive apparatus further comprises means for separating a residual component from the input voice signal after extraction of the sinusoidal wave components, and means for adding the residual component to the output voice signal.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the composition of one embodiment of the present invention;

Fig. 2 is a diagram showing frame states of input voice signal according to the embodiment;

Fig. 3 is an illustrative diagram for describing the detection of

frequency spectrum peaks according to the embodiment;

Fig. 4 is a diagram illustrating the continuation of peak values between frames according to the embodiment;

Fig. 5 is a diagram showing the state of change in frequency values according to the embodiment;

Fig. 6 is a graph showing the state of change of deterministic components during processing according to the embodiment;

Fig. 7 is a block diagram showing the composition of an interpolating and waveform generating section according to the embodiment;

Fig. 8 is a block diagram showing the composition of a modification of the embodiment; and

Fig 9 is a block diagram showing a computer machine used to implement the inventive voice converter.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

Next, an embodiment of the present invention is described. Fig. 1 is a block diagram showing the composition of an embodiment of the present invention. This embodiment relates to a case where a voice converter according to the present invention is applied to a karaoke machine, whereby imitations of a professional singer by a karaoke player can be performed.

Firstly, the principles of this embodiment are described. Initially, a song by an original or professional singer who is to be imitated is analyzed, and the pitch thereof and the amplitude of sinusoidal wave components therein are recorded. Sinusoidal wave components are then extracted from a current

singer's voice, and the pitch and the amplitude of the sinusoidal wave components in the voice being imitated are used to affect or modify these sinusoidal wave components extracted from the current singer's voice. The affected sinusoidal wave components are synthesized to form a synthetic waveform, which is amplified and output. Moreover, the degree to which the wave components are affected can be adjusted by a prescribed control parameter. By means of the aforementioned processing, a voice waveform which reflects the voice characteristics and singing manner of the original or professional singer to be imitated is formed, and this waveform is output whilst a karaoke performance is conducted for the current singer.

In Fig. 1, numeral 1 denotes a microphone, which gathers the singer's voice and provides an input voice signal  $S_v$ . This input voice signal  $S_v$  is then analyzed by a Fast Fourier Transform section 2, and the frequency spectrum thereof is detected. The processing implemented by the Fast Fourier Transform section 2 is carried out in prescribed frame units, so a frequency spectrum is created successively for each frame. Fig. 2 shows the relationship between the input voice signal  $S_v$  and the frames thereof. Symbol FL denotes a frame, and in this embodiment, each frame FL is set such that it overlaps partially with the previous frame FL.

Numeral 3 denotes a peak detecting section for detecting peaks in the frequency spectrum of the input voice signal  $S_v$ . For example, the peak values marked by the X symbols are detected in the frequency spectrum illustrated in Fig. 3. A parameter set of such peak values is output for each frame in the form of frequency value F and amplitude value A co-ordinates, such as  $(F_0, A_0)$ ,  $(F_1, A_1)$ ,  $(F_2, A_2)$ , ...  $(F_N, A_N)$ . Fig. 2 gives a schematic

view of parameter sets of peak values for each frame. Next, a peak continuation section 4 determines continuation between the previous and subsequent frames for the parameter sets of peak values output by the peak detecting section 3 at each frame. Peak values considered to form continuation are subjected to continuation processing such that a data series is created. Here, the continuation processing is described with reference to Fig. 4. The peak values shown in section (A) of Fig. 4 are detected in the previous frame, and the peak values shown in section (B) of Fig. 4 are detected in the subsequent frame. In this case, the peak continuation section 4 investigates whether peak values corresponding to each of the peak values detected in the preceding frame,  $(F_0, A_0)$ ,  $(F_1, A_1)$ ,  $(F_2, A_2)$ , ... ..,  $(F_N, A_N)$ , are also detected in the current frame. It determines whether the corresponding peak values are present according to whether or not a peak is currently detected within a prescribed range about the frequencies of the peak values detected in the preceding frame. In the example in Fig. 4, peak values corresponding to  $(F_0, A_0)$ ,  $(F_1, A_1)$ ,  $(F_2, A_2)$ , ... .. are discovered, but a peak value corresponding to  $(F_K, A_K)$  is not observed.

If the peak continuation section 4 discovers corresponding peak values, then they are coupled in time series order and are output as a data series of sets. If it does not find a corresponding peak value, then the peak value is overwritten by data indicating that there is no corresponding peak for that frame. Fig. 5 shows one example of change in peak frequencies  $F_0$  and  $F_1$ . Change of this kind also occurs in the amplitudes  $A_0$ ,  $A_1$ ,  $A_2$ , ... . In this case, the data series output by the peak continuation section 4 contains scattered or discrete values output at each frame interval. The peak values output by the peak

continuation section 4 are called deterministic components thereafter. This signifies that they are components of the original input voice signal  $S_v$  and can be rewritten definitely as sinusoidal wave elements. Each of the sinusoidal waves (precisely, the amplitude and frequency which are the parameter set of the sinusoidal wave) are called partial components.

Next, an interpolating and waveform generating section 5 carries out interpolation processing with respect to the deterministic components output from the peak continuation section 4, and it generates the sinusoidal waves corresponding to the deterministic components after interpolation. In this case, the interpolation is carried out at intervals corresponding to the sampling rate (for example, 44.1 kHz) of a final output voice signal (signal immediately prior to input to an amplifier 50 described hereinafter). The solid lines shown on Fig. 5 illustrate a case where the interpolation processing is carried out with respect to peak values  $F_0$  and  $F_1$ .

Here, Fig. 7 shows the composition of the interpolating and waveform generating section 5. The elements 5a, 5a, ... shown in this diagram are respective partial waveform generating sections, which generate sinusoidal waves corresponding to the specified frequency values and amplitude values. Here, the deterministic components  $(F_0, A_0)$ ,  $(F_1, A_1)$ ,  $(F_2, A_2)$ , ... in the present embodiment change from moment to moment in accordance with the respective interpolations, so the waveforms output from the partial waveform generating sections 5a, 5a, ... follow these changes. In other words, since the deterministic components  $(F_0, A_0)$ ,  $(F_1, A_1)$ ,  $(F_2, A_2)$ , ... are output successively by the peak continuation section 4, and are each subjected to the interpolation, each of the partial waveform generating sections 5a, 5a, ...

outputs a sinusoidal waveform whose frequency and amplitude fluctuates within a prescribed range. The waveforms output by the respective partial waveform generating sections 5a, 5a, ... are added and synthesized at an adding section 5b. Therefore, the synthetic voice signal from the interpolating and waveform generating section 5 has only the deterministic components which have been extracted from the original input voice signal Sv.

Next, a deviation detecting section 6 shown in Fig. 1 calculates the deviation between the synthetic voice signal exclusively composed of the deterministic wave components output by the interpolating and waveform generating section 5 and the original input voice signal Sv. Hereinafter, the deviation components are called residual components Srd. The residual components Srd comprise a large number of voiceless components such as noises and consonants contained in the singing voice of the karaoke player. The aforementioned deterministic components, on the other hand, correspond to voiced components. When imitating someone's voice, the voiced components only are processed and there is no particular need to process the voiceless components. Therefore, in this embodiment, voice conversion processing is carried out only with respect to the deterministic components corresponding to the voiced components.

Next, numeral 10 shown in Fig. 1 denotes a separating section, where the frequency values  $F0 - FN$  and the amplitude values  $A0 - AN$  are separated from the data series output by the peak continuation section 4. The pitch detecting section 11 detects the pitch of the original input voice signal at each frame on the basis of the frequency values or the deterministic components supplied by the separating section 10. In the pitch detection process, a

prescribed number of (for example, approximately three) frequency values are selected from the lowest of the frequency values output by the separating section 10, prescribed weighting is applied to these frequency values, and the average thereof is calculated to give a pitch PS. Furthermore, for frames in which a pitch cannot be detected, the pitch detecting section 11 outputs a signal indicating that there is no pitch. A frame containing no pitch occurs in cases where the input voice signal Sv in the frame is constituted almost entirely by voiceless or unvoiced components and noises. In frames of this kind, since the frequency spectrum does not form a harmonic structure, it is determined that there is no pitch.

Next, numeral 20 denotes a target information storing section wherein reference information relating to the object whose voice is to be imitated or emulated (hereinafter, called the target) is stored. The target information storing section 20 holds the reference or target information on the target for separate karaoke songs. The target information comprises pitch information PTo representing a discrete musical pitch of the target voice, a pitch fluctuation component or fractional pitch information PTf, and amplitude information representing deterministic amplitude components (corresponding to the amplitude values A0, A1, A2, ... output by the separating section 10.) These information elements are stored respectively in a musical pitch storing section 21, a fluctuation pitch storing section 22 and a deterministic amplitude component storing section 23. The target information storing section 20 is composed such that the respective items of information described above are read out in synchronism with the karaoke performance. The karaoke performance is implemented in a performance section 27 illustrated in Fig. 1.

Song data for use in karaoke is previously stored in the performance section 27. Request song data selected by a user control (omitted from diagram) is read out successively as the music proceeds, and is supplied to an amplifier 50. In this case, the performance section 27 supplies a control signal  $Sc$  indicating the song title and the state of progress of the song to the target information storing section 20, which proceeds to read out the aforementioned target information elements on the basis of this control signal  $Sc$ .

Next, the pitch information  $PTo$  of the target or reference voice read out from the musical pitch storing section 21 is mixed with the pitch  $PS$  of the input voice signal in a ratio control section 30. This mixing is carried out on the basis of the following equation.

$$(1.0 - \alpha) * PS + \alpha * PTo$$

Here,  $\alpha$  is a control parameter which may take a value from 0 to 1. The signal output from the ratio control section 30 is equal to pitch  $PS$  when  $\alpha = 0$ , and it is equal to pitch information  $PTo$  when  $\alpha = 1$ . Furthermore, the parameter  $\alpha$  is set to a desired value by means of a user control of a parameter setting section 25. The parameter setting section 25 can also be used to set control parameters  $\beta$  and  $\gamma$ , which are described hereinafter.

Next, a pitch normalizing section 12 as illustrated in Fig. 1 divides each of the frequency values  $F0 - FN$  output from the separating section 10 by the pitch  $PS$ , thereby normalizing the frequency values. Each of the normalized frequency values  $F0/PS - FN/PS$  (dimensionless) is multiplied by the signal from the ratio control section 30 by means of a multiplier 15, and the dimension thereof becomes frequency once again. In this case, it is



determined from the value of the parameter  $\alpha$  whether the pitch of the singer inputting his or her voice via the microphone 1 has a larger effect or whether the target pitch has a larger effect.

Another ratio control section 31 multiplies the fluctuation component PTf output from the fluctuation pitch storing section 22 by the parameter  $\beta$  (where  $0 \leq \beta \leq 1$ ), and outputs the result to a multiplier 14. In this case, the fluctuation component PTf indicates the divergence relating to the pitch information PTo in cent units. Therefore, the fluctuation component PTf is divided by 1200 (1 octave is 1200 cents) in the ratio control section 31, and calculation for finding the second power thereof is carried out, namely, the following calculation:

$$\text{POW}(2, (\text{PTf} * \beta / 1200))$$

The calculation results and the output signal from the multiplier 15 is multiplied with each other by the multiplier 14. The output signal from the multiplier 14 is further multiplied by the output signal of a transposition control section 32 at a multiplier 17. The transposition control section 32 outputs values corresponding to the musical interval through which transposition is performed. The degree of transposition is set as desired. Normally, it is set to no transposition, or a change in octave units is specified. A change in octave units is specified in cases where there is an octave difference in the musical intervals being sung, for instance, where the target is male and the karaoke singer is female (or vice versa). As described above, the target pitch and fluctuation component are appended to the frequency vales output from the pitch normalizing section 12, and if necessary, octave

transposition is carried out, whereupon the signal is input to a mixer 40.

Next, numeral 13 illustrated in Fig. 1 denotes an amplitude detecting section, which detects the mean value MS of the amplitude values A0, A1, A2, ... supplied by the separating section 10 at each frame. In an amplitude normalizing section 16, the amplitudes values A0, A1, A2 are normalized by dividing them by this mean value MS. In a ratio control section 18, the deterministic amplitude components AT0, AT1, AT2 ... (normalized) which are read out from the deterministic amplitude component storing section 23, are mixed with the aforementioned normalized amplitude values. The degree of mixing is determined by the parameter  $\gamma$ . If the deterministic amplitude components AT0, AT1, AT2, ... are represented by ATn ( $n = 1, 2, 3, \dots$ ), and the amplitude values output by the amplitude normalizing section 16 are represented by ASn' ( $n = 1, 2, 3, \dots$ ), then the operation of the ratio control section 18 can be expressed by the following calculation.

$$(1 - \gamma) * ASn' + \gamma * ATn$$

The parameter  $\gamma$  is set as appropriate in the parameter setting section 25, and it takes a value from zero to one. The larger the value of  $\gamma$ , the greater the effect of the target. Since the amplitude of the sinusoidal wave components in the voice signal determines voice characteristics, the voice becomes closer to the characteristics of the target, the larger the value of  $\gamma$ . The output signal from the ratio control section 18 is multiplied by the mean value MS in a multiplier 19. In other words, it is converted from a normalized signal to a signal which represents the amplitude directly.

Next, in the mixer 40, the amplitude values and the frequency values

are combined. This combined signal comprises the deterministic components of the voice signal  $S_v$  of the karaoke singer, with the deterministic components of the target voice added thereto. Depending on the values of the parameters  $\alpha$ ,  $\beta$  and  $\gamma$ , 100% target-side deterministic components can be obtained for the output voice signal. These deterministic components (group of partial components which are sinusoidal waves) are supplied to an interpolating and waveform generating section 41. The interpolating and waveform generating section 41 is constituted similarly to the aforementioned interpolating and waveform generating section 5 (see Fig. 7). The interpolating and waveform generating section 41 interpolates the partial components or the deterministic components output from the mixer 40, and it generates partial sinusoidal waveforms on the basis of these respective partial components after the interpolation, and synthesizes these partial waveforms to form the output voice signal. The synthesized waveforms are added to the residual component  $S_{rd}$  at an adder 42, and are then supplied via a switching section 43 to the amplifier 50. In frames where no pitch can be detected by the pitch detecting section 11, the switching section 43 supplies the amplifier 50 with the input voice signal  $S_v$  of the singer instead of the synthesized voice signal output from the adder 42. This is because, since the aforementioned processing is not required for noise or voiceless voice, it is preferable to output the original voice signal directly.

As described above, the inventive voice converting apparatus synthesizes the output voice signal from the input voice signal  $S_v$  and the reference or target voice signal. In the inventive apparatus, an analyzer device 9 comprised of the FFT 2, peak detecting section 3, peak continuation

section 4 and other sections analyzes a plurality of sinusoidal wave components contained in the input voice signal  $S_v$  to derive a parameter set  $(F_n, A_n)$  of an original frequency and an original amplitude representing each sinusoidal wave component. A source device composed of the target information memory section 20 provides reference information ( $P_{to}$ ,  $P_{Tf}$  and  $A_T$ ) characteristic of the reference voice signal. A modulator device including the arithmetic sections 12, 14-19 and 30-32 modulates the parameter set  $(F_n, A_n)$  of each sinusoidal wave component according to the reference information ( $P_{to}$ ,  $P_{Tf}$  and  $A_T$ ). A regenerator device composed of the interpolation and waveform generating section 41 operates according to each of the parameter sets  $(F_n, A_n)$  as modulated to regenerate each of the sinusoidal wave components so that at least one of the frequency and the amplitude of each sinusoidal wave component as regenerated varies from original one, and mixes the regenerated sinusoidal wave components altogether to synthesize the output voice signal.

Specifically, the source device provides the reference information ( $P_{to}$  and  $P_{Tf}$ ) characteristic of a pitch of the reference voice signal. The modulator device modulates the parameter set of each sinusoidal wave component according to the reference information so that the frequency of each sinusoidal wave component as regenerated varies from the original frequency. By such a manner, the pitch of the output voice signal is synthesized according to the pitch of the reference voice signal. Further, the source device provides the reference information characteristic of both of a discrete pitch  $P_{to}$  matching a music scale and a fractional pitch  $P_{Tf}$  fluctuating relative to the discrete pitch. By such a manner, the pitch of the

output voice signal is synthesized according to both of the discrete pitch and the fractional pitch of the reference voice signal.

Further, the source device provides the reference information AT characteristic of a timbre of the reference voice signal. The modulator device modulates the parameter set of each sinusoidal wave component according to the reference information AT so that the amplitude of each sinusoidal wave component as regenerated varies from the original amplitude. By such a manner, the timbre of the output voice signal is synthesized according to the timbre of the reference voice signal.

The inventive voice converting apparatus includes a control device in the form of the parameter setting section 25 that provides a control parameter ( $\alpha$ ,  $\beta$  and  $\gamma$ ) effective to control the modulator device so that a degree of modulation of the parameter set ( $F_n$  and  $A_n$ ) is variably determined according to the control parameter. The inventive apparatus further includes a detector device in the form of the pitch detecting section 11 that detects a pitch PS of the input voice signal Sv based on analysis of the sinusoidal wave components by the analyzer device 9, and a switch device in the form of the switching section 43 operative when the detector device does not detect the pitch PS from the input voice signal Sv for outputting an original of the input voice signal Sv in place of the synthesized output voice signal. Still further, the inventive apparatus includes a memory device in the form of a volume data section 60 (described later in detail with reference to Fig. 8) that memorizes volume information representative of a volume variation of the reference voice signal, and a volume device composed of a multiplier 62 (described later in detail with reference to Fig. 8) that varies a volume of the output voice

signal according to the volume information so that the output voice signal emulates or imitate the volume variation of the reference voice signal. Moreover, the inventive apparatus includes a separator device in the form of the residual detecting section 6 that separates a residual component  $S_{dr}$  other than the sinusoidal wave components from the input voice signal, and an adder device composed of the adder 42 that adds the residual component  $S_{dr}$  to the output voice signal.

Next, the operation of the embodiment having the foregoing composition is described. Firstly, when a karaoke song is specified, the song data for that karaoke song is read out by the performance section 27, and a musical accompaniment sound signal is created on the basis of this song data and supplied to the amplifier 50. The singer then starts to sing the karaoke song to this accompaniment, thereby causing the input voice signal  $S_v$  to be output from the microphone 1. The deterministic components of this input voice signal  $S_v$  are detected successively by the peak detecting section 3, a frame by frame. For example, sampling results as illustrated in part (1) of Fig. 6 are obtained. Fig. 6 shows the signal obtained for a single frame. For each frame, continuation is created between partial components and these are separated by the separating section 10 and divided into frequency values and amplitude values, as illustrated in part (2) and (3) of Fig. 6. Furthermore, the frequency values are normalized by the pitch normalizing section 12 to give the values shown in part (4) of Fig. 6. The amplitude values are similarly normalized to give the values shown in part (5) of Fig. 6. The normalized amplitude values illustrated in part (5) of Fig. 6 are combined with the normalized amplitude values of the target voice as shown in part (6) to

give modulated amplitude values as shown in part (8). The ratio of this combination is determined by the control parameter  $\gamma$ .

Meanwhile, the frequency values shown in part (4) of Fig. 6 are combined with the target pitch information PTo and the fluctuation component PTf to give the modulated frequency values shown in part (7) of Fig. 6. The ratio of this combination is determined by the control parameters  $\alpha$  and  $\beta$ . The frequency values and the amplitude values shown in parts (7) and (8) of Fig. 6 are combined by the mixing section 40, thereby yielding new deterministic components as illustrated in part (9) of Fig. 6. These new deterministic components are formed into a synthetic output voice signal by the interpolating and waveform generating section 41, and this output voice signal is mixed with the residual components Srd and output to the amplifier 50. As a result of the above, the singer's voice is output with the karaoke accompaniment, but the characteristics of the voice, the manner of singing, and the like, are significantly affected or influenced by the target voice. If the control parameters  $\alpha$ ,  $\beta$  and  $\gamma$  are set to values of 1, the voice characteristics and singing manner of the target are adopted completely. In this way, singing which imitates the target precisely is output.

As described above, the inventive voice converting method converts an input voice signal Sv into an output voice signal according to a reference voice signal or target voice signal. In one aspect, the inventive method is comprised of the steps of extracting a plurality of sinusoidal wave components (Fn and An) from the input voice signal Sv, memorizing pitch information (PTo and PTf) representative of a pitch of the reference voice signal, modulating a frequency Fn of each sinusoidal wave component according to

the memorized pitch information, mixing the plurality of the sinusoidal wave components having the modulated frequencies to synthesize the output voice signal having a pitch different from that of the input voice signal and influenced by that of the reference voice signal. In another aspect, the inventive method is comprised of the steps of extracting a plurality of sinusoidal wave components from the input voice signal  $S_v$ , memorizing amplitude information  $A_T$  representative of amplitudes of sinusoidal wave components contained in the reference voice signal, modulating an amplitude  $A_n$  of each sinusoidal wave component extracted from the input voice signal  $S_v$  according to the memorized amplitude information, and mixing the plurality of the sinusoidal wave components having the modulated amplitudes to synthesize the output voice signal having a voice characteristic or timbre different from that of the input voice signal  $S_v$  and influenced by that of the reference voice signal.

## MODIFICATIONS

(1) As shown in Fig. 8, a normalized volume data storing section 60 is provided for storing normalized volume data indicating changes in the volume of the target voice. The normalized volume data read out from the normalized volume data storing section 60 is multiplied by a control parameter  $k$  at a multiplier 61, and is then multiplied at a further multiplier 62 with the synthesized waveform output from the switching section 43. By adopting the foregoing composition, it is even possible to imitate precisely the intonation of the target singing voice. The degree to which the intonation is imitated in this case is determined by the value of the control parameter  $k$ .



Therefore, the parameter  $k$  should be set according to the degree of imitation desired by the user.

(2) In the present embodiment, the presence or absence of a pitch in a subject frame is determined by the pitch detecting section 11. However, detection of pitch presence is not limited to this, and may also be determined directly from the state of the input voice signal  $S_v$ .

(3) Detection of sinusoidal wave components is not limited to the method used in the present embodiment. Other methods might be possible to detect sinusoidal waves contained in the voice signal.

(4) In the present embodiment, the target pitch and deterministic amplitude components are recorded. Alternatively, it is possible to record the actual voice of the target and then to read it out and extract the pitch and deterministic amplitude components by real-time processing. In other words, processing similar to that carried out on the voice of the singer in the present embodiment may also be applied to the voice of the target.

(5) In the present embodiment, both the musical pitch and the fluctuation component of the target are used in processing, but it is possible to use musical pitch alone. Moreover, it is also possible to create and use pitch data which combines the musical pitch and fluctuation component.

(6) In the present embodiment, both the frequency and amplitude of the deterministic components of the singer's voice signal are converted, but it is also possible to convert either frequency or amplitude alone.

(7) In the present embodiment, a so-called oscillator system is adopted which uses an oscillating device for the interpolating and waveform generating section 5 or 41. Besides this, it is also possible to use a reverse

FFT, for example.

(8) The inventive voice converter may be implemented by a general computer machine as shown in Fig. 9. The computer machine is comprised of a CPU, a RAM, a disk drive for accessing a machine readable medium M such as a floppy disk or CO-ROM, an input device including a microphone, a keyboard and a mouse tool, and an output device including a loudspeaker and a display. The machine readable medium M is used in the computer machine having the CPU for synthesizing an output voice signal from an input voice signal and a reference voice signal. The medium M contains program instructions executable by the CPU for causing the computer machine to perform the method comprising the steps of analyzing a plurality of sinusoidal wave components contained in the input voice signal to derive a parameter set of an original frequency and an original amplitude representing each sinusoidal wave component, providing reference information characteristic of the reference voice signal, modulating the parameter set of each sinusoidal wave component according to the reference information, regenerating each of the sinusoidal wave components according to each of the modulated parameter sets so that at least one of the frequency and the amplitude of each regenerated sinusoidal wave component varies from original one, and mixing the regenerated sinusoidal wave components altogether to synthesize the output voice signal.

As described above, according to the present invention, it is possible to convert a voice such that it imitates the voice characteristics and singing manner of a target voice.

What is claimed is:

1 An apparatus for converting an input voice signal into an output voice signal according to a reference voice signal, the apparatus comprising:

extracting means for extracting a plurality of sinusoidal wave components from the input voice signal;

memory means for memorizing pitch information representative of a pitch of the reference voice signal;

modulating means for modulating a frequency of each sinusoidal wave component according to the pitch information retrieved from the memory means; and

mixing means for mixing the plurality of the sinusoidal wave components having the modulated frequencies to synthesize the output voice signal having a pitch different from that of the input voice signal and influenced by that of the reference voice signal.

2 The apparatus as claimed in claim 1, further comprising control means for setting a control parameter effective to control a degree of modulation of the frequency of each sinusoidal wave component by the modulating means so that a degree of influence of the pitch of the reference voice signal to the pitch of the output voice signal is determined according to the control parameter.

3 The apparatus as claimed in claim 1, wherein the memory means comprises means for memorizing primary pitch information representative of a discrete pitch matching a music scale, and secondary pitch information

representative of a fractional pitch fluctuating relative to the discrete pitch, and wherein the modulating means comprises means for modulating the frequency of each sinusoidal wave component according to both of the primary pitch information and the secondary pitch information.

4 The apparatus as claimed in claim 1, further comprising detecting means for detecting a pitch of the input voice signal based on results of extraction of the sinusoidal wave components, and switch means operative when the detecting means does not detect the pitch from the input voice signal for outputting an original of the input voice signal in place of the synthesized output voice signal.

5 The apparatus as claimed in claim 1, wherein the memory means further comprises means for memorizing amplitude information representative of amplitudes of sinusoidal wave components contained in the reference voice signal, and the modulating means further comprises means for modulating an amplitude of each sinusoidal wave component of the input voice signal according to the amplitude information, so that the mixing means mixes the plurality of the sinusoidal wave components having the modulated amplitudes to synthesize the output voice signal having a timbre different from that of the input voice signal and influenced by that of the reference voice signal.

6 The apparatus as claimed in claim 5, further comprising means for setting a control parameter effective to control a degree of modulation of the amplitude of each sinusoidal wave component by the modulating means so

that a degree of influence of the timbre of the reference voice signal to the timbre of the output voice signal is determined according to the control parameter.

7 The apparatus as claimed in claim 1, further comprising means for memorizing volume information representative of a volume variation of the reference voice signal, and means for varying a volume of the output voice signal according to the volume information so that the output voice signal emulates the volume variation of the reference voice signal.

8 The apparatus as claimed in claim 1, further comprising means for separating a residual component from the input voice signal after extraction of the sinusoidal wave components, and means for adding the residual component to the output voice signal.

9 An apparatus for converting an input voice signal into an output voice signal according to a reference voice signal, the apparatus comprising:

extracting means for extracting a plurality of sinusoidal wave components from the input voice signal;

memory means for memorizing amplitude information representative of amplitudes of sinusoidal wave components contained in the reference voice signal;

modulating means for modulating an amplitude of each sinusoidal wave component extracted from the input voice signal according to the amplitude information retrieved from the memory means; and

mixing means for mixing the plurality of the sinusoidal wave components having the modulated amplitudes to synthesize the output voice signal having a timbre different from that of the input voice signal and influenced by that of the reference voice signal.

10 The apparatus as claimed in claim 9, further comprising control means for setting a control parameter effective to control a degree of modulation of the amplitude of each sinusoidal wave component by the modulating means so that a degree of influence of the timbre of the reference voice signal to the timbre of the output voice signal is determined according to the control parameter.

11 The apparatus as claimed in claim 9, wherein the memory means further memorizes pitch information representative of a pitch of the reference voice signal, and the modulating means further modulates a frequency of each sinusoidal wave component of the input voice signal according to the pitch information, so that the mixing means mixes the plurality of the sinusoidal wave components having the modulated frequencies to synthesize the output voice signal having a pitch different from that of the input voice signal and influenced by that of the reference voice signal.

12 The apparatus as claimed in claim 11, further comprising means for setting a control parameter effective to control a degree of modulation of the frequency of each sinusoidal wave component by the modulating means so that a degree of influence of the pitch of the reference voice signal to the pitch

of the output voice signal is determined according to the control parameter.

13 The apparatus as claimed in claim 11, wherein the memory means comprises means for memorizing primary pitch information representative of a discrete pitch matching a music scale, and secondary pitch information representative of a fractional pitch fluctuating relative to the discrete pitch, and wherein the modulating means comprises means for modulating the frequency of each sinusoidal wave component according to both of the primary pitch information and the secondary pitch information.

14 The apparatus as claimed in claim 9, further comprising detecting means for detecting a pitch of the input voice signal based on results of extraction of the sinusoidal wave components, and switch means operative when the detecting means does not detect the pitch from the input voice signal for outputting an original of the input voice signal in place of the synthesized output voice signal.

15 The apparatus as claimed in claim 9, further comprising means for memorizing volume information representative of a volume variation of the reference voice signal, and means for varying a volume of the output voice signal according to the volume information so that the output voice signal emulates the volume variation of the reference voice signal.

16 The apparatus as claimed in claim 9, further comprising means for

separating a residual component from the input voice signal after extraction of the sinusoidal wave components, and means for adding the residual component to the output voice signal.

17 An apparatus for synthesizing an output voice signal from an input voice signal and a reference voice signal, the apparatus comprising:

an analyzer device that analyzes a plurality of sinusoidal wave components contained in the input voice signal to derive a parameter set of an original frequency and an original amplitude representing each sinusoidal wave component;

a source device that provides reference information characteristic of the reference voice signal;

a modulator device that modulates the parameter set of each sinusoidal wave component according to the reference information; and

a regenerator device that operates according to each of the parameter sets as modulated to regenerate each of the sinusoidal wave components so that at least one of the frequency and the amplitude of each sinusoidal wave component as regenerated varies from original one, and that mixes the regenerated sinusoidal wave components altogether to synthesize the output voice signal.

18 The apparatus as claimed in claim 17, wherein the source device provides the reference information characteristic of a pitch of the reference voice signal, and wherein the modulator device modulates the parameter set of each sinusoidal wave component according to the reference information so



that the frequency of each sinusoidal wave component as regenerated varies from the original frequency, thereby the pitch of the output voice signal being synthesized according to the pitch of the reference voice signal.

19 The apparatus as claimed in claim 18, wherein the source device provides the reference information characteristic of both of a discrete pitch matching a music scale and a fractional pitch fluctuating relative to the discrete pitch, thereby the pitch of the output voice signal being synthesized according to both of the discrete pitch and the fractional pitch of the reference voice signal.

20 The apparatus as claimed in claim 17, wherein the source device provides the reference information characteristic of a timbre of the reference voice signal, and wherein the modulator device modulates the parameter set of each sinusoidal wave component according to the reference information so that the amplitude of each sinusoidal wave component as regenerated varies from the original amplitude, thereby the timbre of the output voice signal being synthesized according to the timbre of the reference voice signal.

21 The apparatus as claimed in claim 17, further comprising a control device that provides a control parameter effective to control the modulator device so that a degree of modulation of the parameter set is variably determined according to the control parameter.

22 The apparatus as claimed in claim 17, further comprising a detector

device that detects a pitch of the input voice signal based on analysis of the sinusoidal wave components by the analyzer device, and a switch device operative when the detector device does not detect the pitch from the input voice signal for outputting an original of the input voice signal in place of the synthesized output voice signal.

23 The apparatus as claimed in claim 17, further comprising a memory device that memorizes volume information representative of a volume variation of the reference voice signal, and a volume device that varies a volume of the output voice signal according to the volume information so that the output voice signal emulates the volume variation of the reference voice signal.

24 The apparatus as claimed in claim 17, further comprising a separator device that separates a residual component other than the sinusoidal wave components from the input voice signal, and an adder device that adds the residual component to the output voice signal.

25 A method of converting an input voice signal into an output voice signal according to a reference voice signal, the method comprising the steps of:

extracting a plurality of sinusoidal wave components from the input voice signal;

memorizing pitch information representative of a pitch of the reference voice signal;

modulating a frequency of each sinusoidal wave component according to the memorized pitch information; and

mixing the plurality of the sinusoidal wave components having the modulated frequencies to synthesize the output voice signal having a pitch different from that of the input voice signal and influenced by that of the reference voice signal.

26 A method of converting an input voice signal into an output voice signal according to a reference voice signal, the method comprising the steps of:

extracting a plurality of sinusoidal wave components from the input voice signal;

memorizing amplitude information representative of amplitudes of sinusoidal wave components contained in the reference voice signal;

modulating an amplitude of each sinusoidal wave component extracted from the input voice signal according to the memorized amplitude information; and

mixing the plurality of the sinusoidal wave components having the modulated amplitudes to synthesize the output voice signal having a timbre different from that of the input voice signal and influenced by that of the reference voice signal.

27 A machine readable medium used in a computer machine having a CPU for synthesizing an output voice signal from an input voice signal and a reference voice signal, the medium containing program instructions

executable by the CPU for causing the computer machine to perform the method comprising the steps of:

analyzing a plurality of sinusoidal wave components contained in the input voice signal to derive a parameter set of an original frequency and an original amplitude representing each sinusoidal wave component;

providing reference information characteristic of the reference voice signal;

modulating the parameter set of each sinusoidal wave component according to the reference information;

regenerating each of the sinusoidal wave components according to each of the modulated parameter sets so that at least one of the frequency and the amplitude of each regenerated sinusoidal wave component varies from original one; and

mixing the regenerated sinusoidal wave components altogether to synthesize the output voice signal.

## ABSTRACT OF THE DISCLOSURE

A voice converter synthesizes an output voice signal from an input voice signal and a reference voice signal. In the voice converter, an analyzer device analyzes a plurality of sinusoidal wave components contained in the input voice signal to derive a parameter set of an original frequency and an original amplitude representing each sinusoidal wave component. A source device provides reference information characteristic of the reference voice signal. A modulator device modulates the parameter set of each sinusoidal wave component according to the reference information. A regenerator device operates according to each of the parameter sets as modulated to regenerate each of the sinusoidal wave components so that at least one of the frequency and the amplitude of each sinusoidal wave component as regenerated varies from original one, and mixes the regenerated sinusoidal wave components altogether to synthesize the output voice signal.

FIG.1

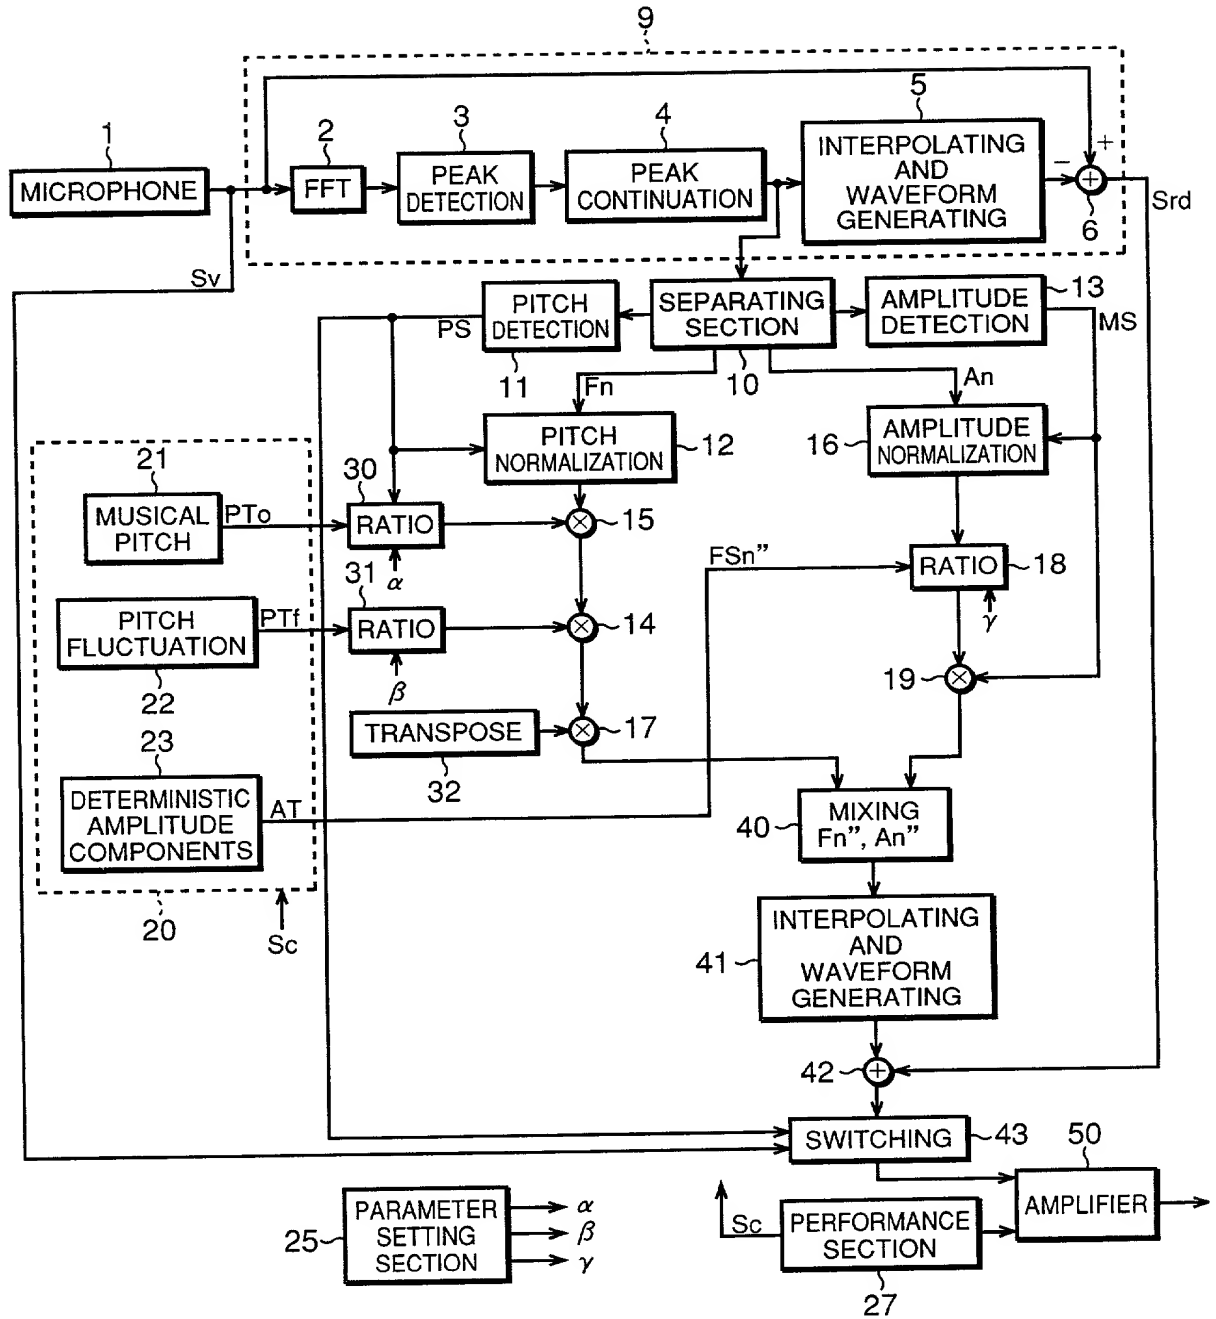


FIG.2

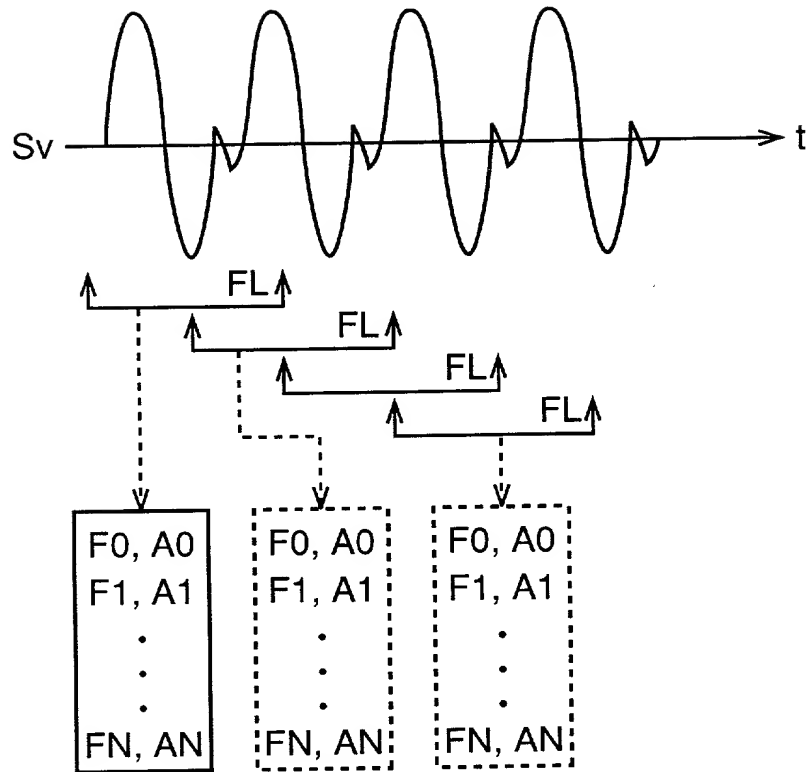


FIG.3

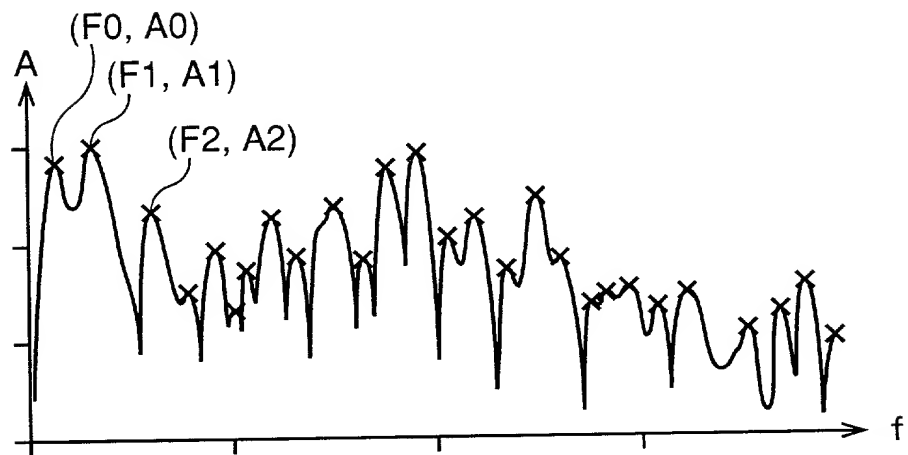


FIG.4

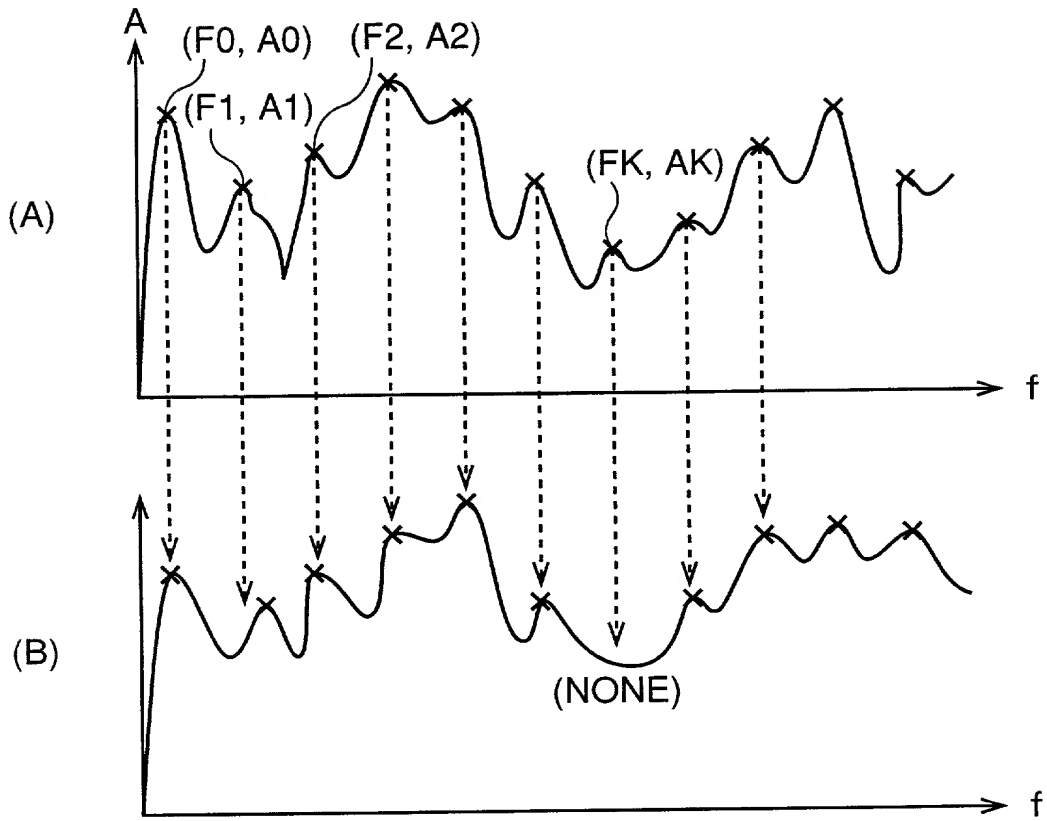


FIG.5

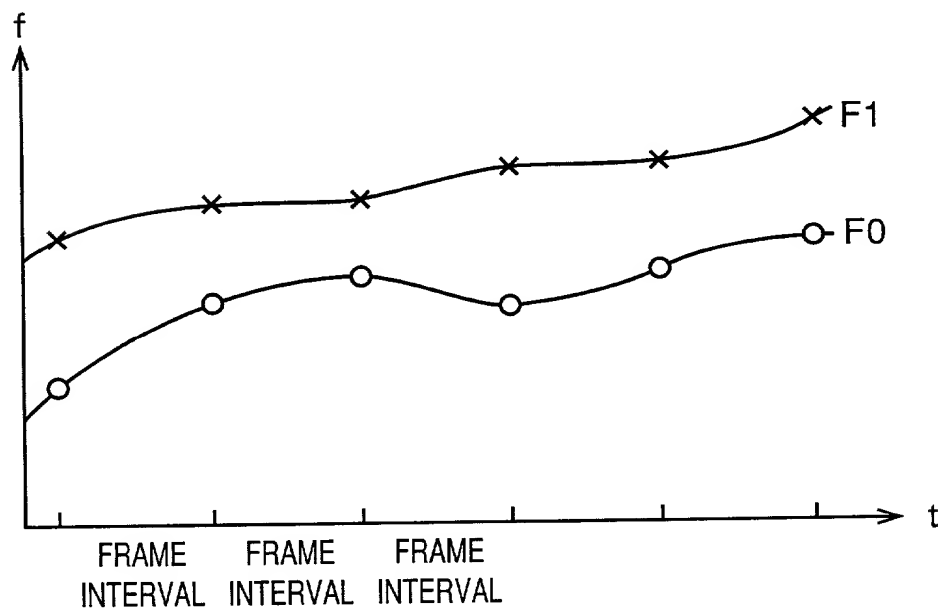




FIG.6

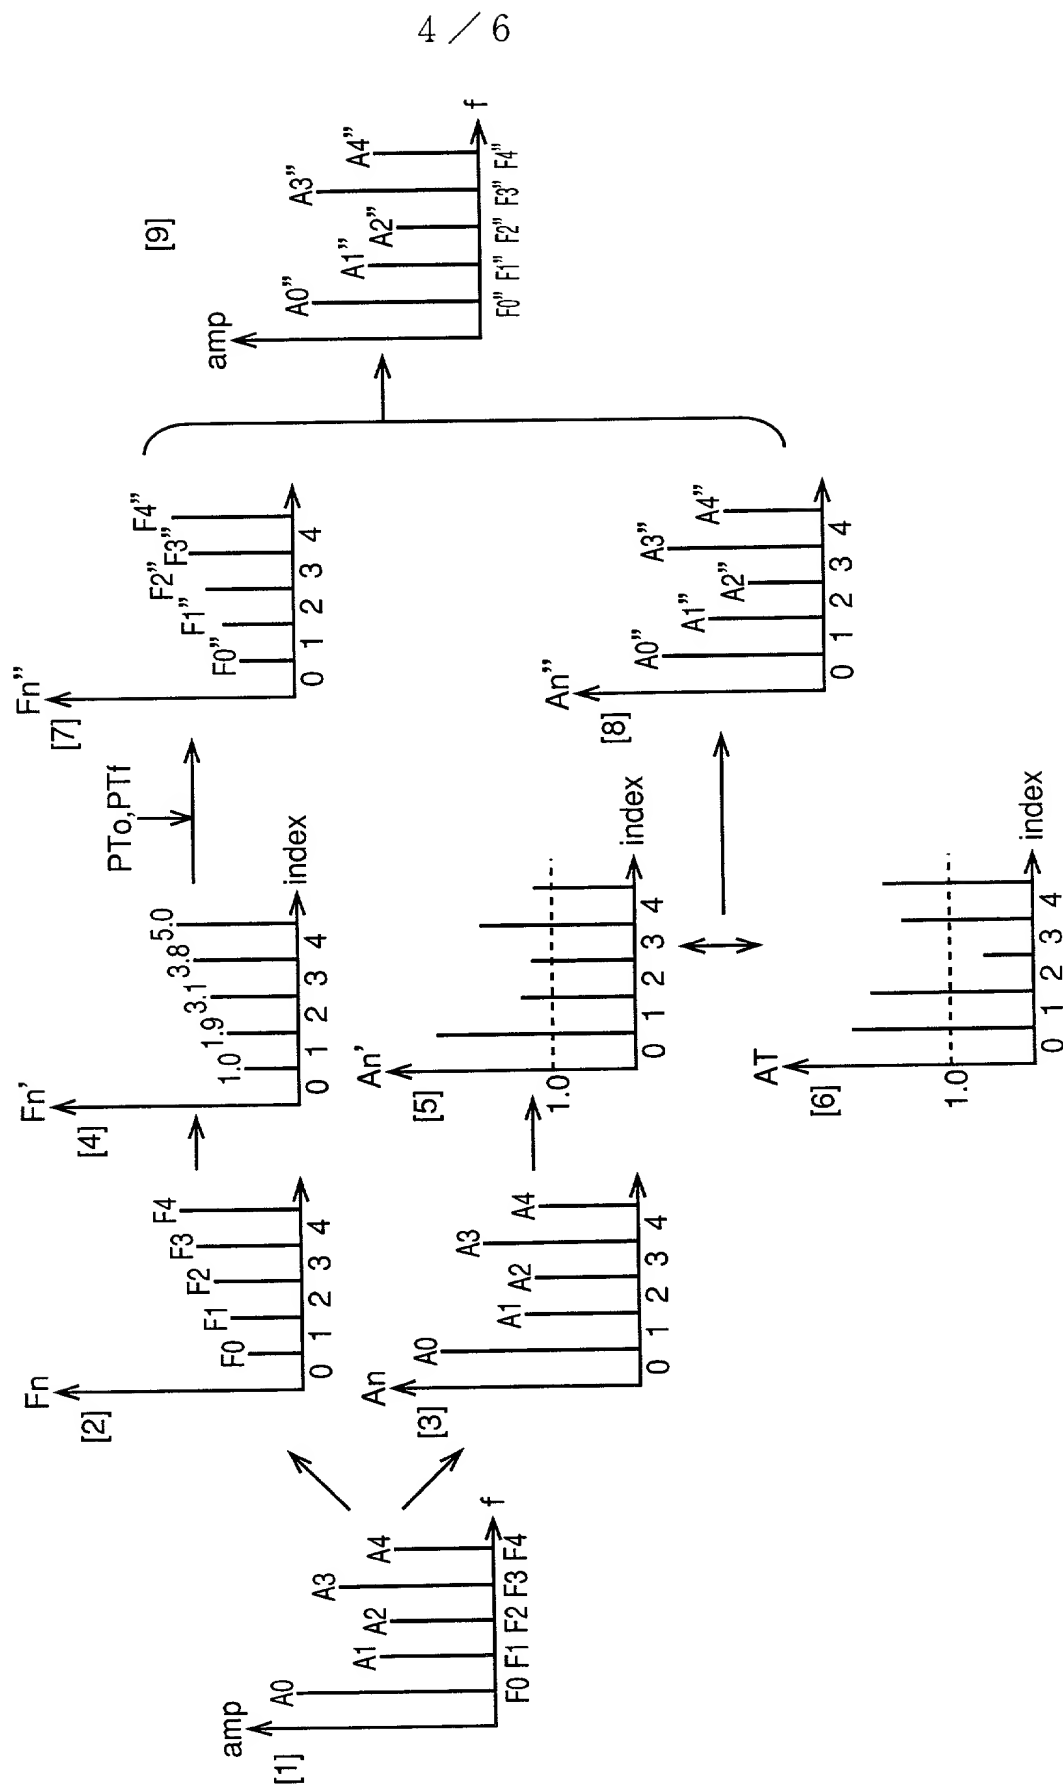


FIG.7

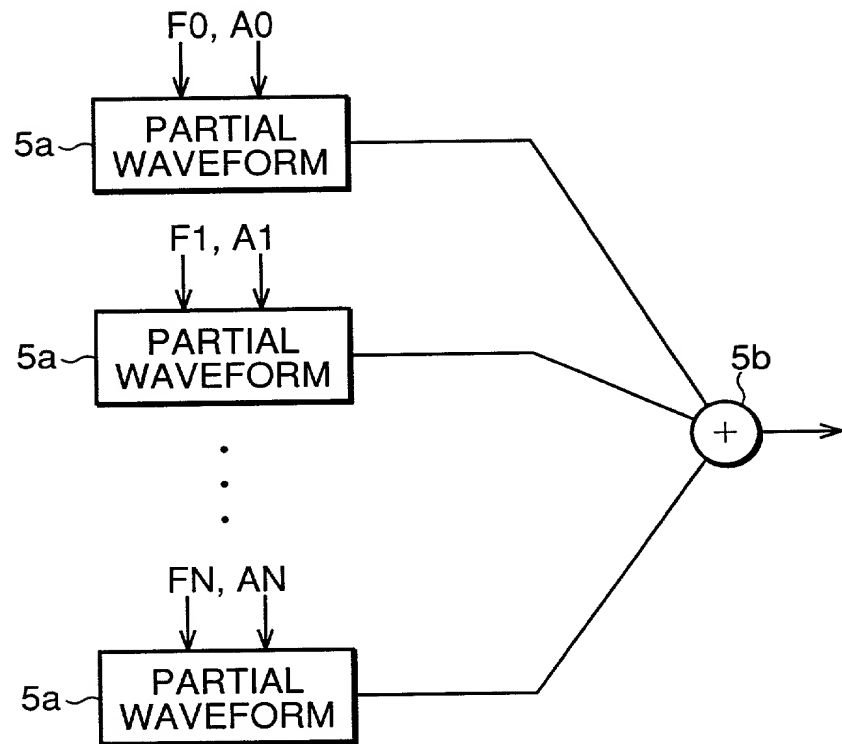


FIG.8


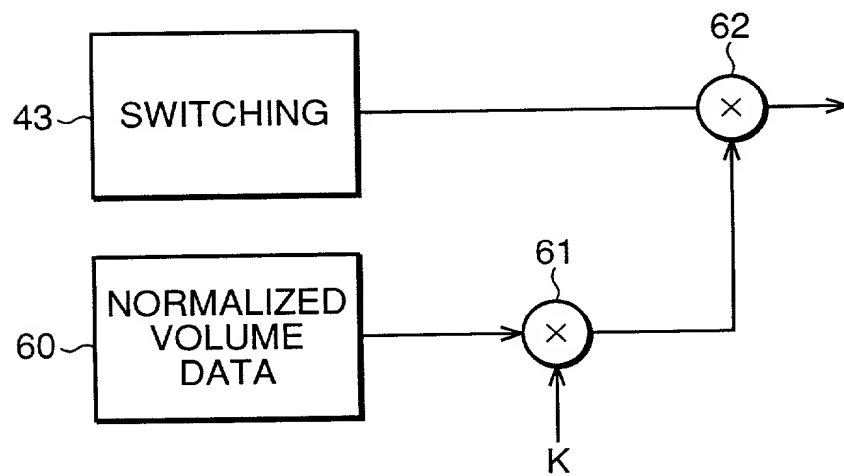


FIG.9

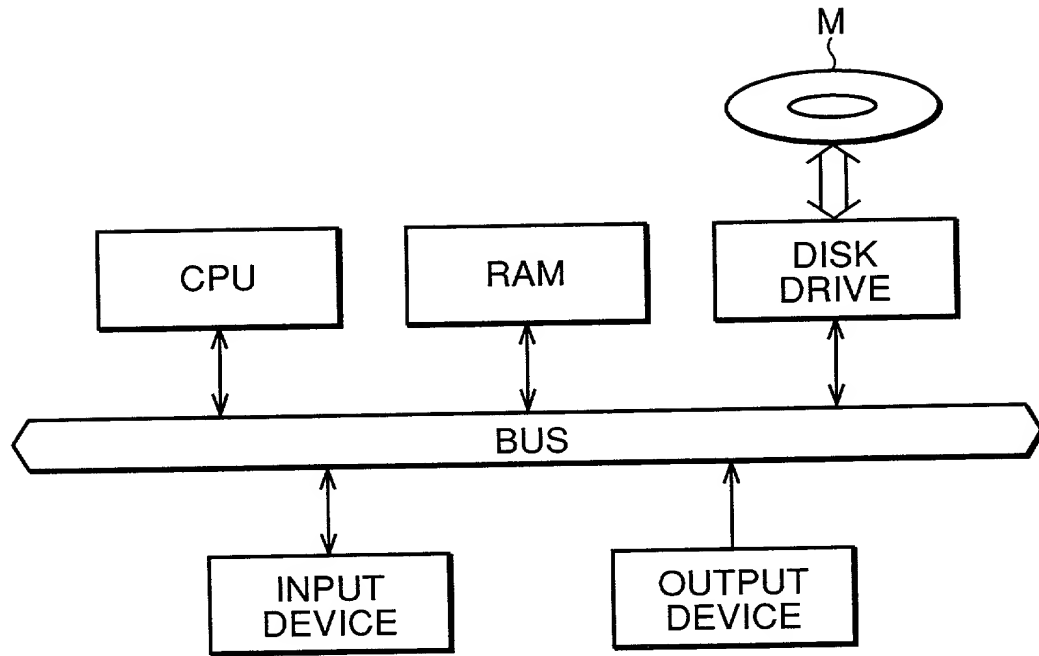

**DECLARATION  
and POWER OF ATTORNEY**

- ☒ ORIGINAL  
☐ CONTINUATION  
☐ DIVISIONAL

As a below named inventor, I declare that the information given herein is true, that I believe that I am the original, first and sole inventor if only one name is listed at 1 below, or a joint inventor if plural inventors are named below at 1-6, for the invention entitled: CONVERTING APPARATUS OF VOICE SIGNAL BY MODULATION OF FREQUENCIES AND AMPLITUDES OF SINUSOIDAL WAVE COMPONENTS

Which is described and claimed in:

- ☒ the attached specification or  
☐ the specification in application Serial No. \_\_\_\_\_ filed \_\_\_\_\_  
☐ as amended on \_\_\_\_\_ (for declaration not accompanying application, if applicable)

and for which a patent is sought, and that my residence, post office address and citizenship are as stated below next to my name.

I acknowledge my duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations §1.56.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I hereby claim priority benefits under Title 35, United States Code, §119 of any application(s) for patent or inventor's certificate listed below and have also identified below any application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

**PRIOR APPLICATION(S)**

| COUNTRY | APPLICATION NUMBER | DATE OF FILING<br>Month Day Year | PRIORITY<br>CLAIMED UNDER<br>35 U.S.C. §119 |                             |
|---------|--------------------|----------------------------------|---|-----------------------------|
|         |                    |                                  | YES <input checked="" type="checkbox"/>     | NO <input type="checkbox"/> |
| JAPAN   | 9-296050           | 10/28/1997                       | YES <input type="checkbox"/>                | NO <input type="checkbox"/> |

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Serial No.)

(Filing Date)

(Status)

**POWER OF ATTORNEY:**

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Paul N. Kokulis, Reg. No. 16,773  
Raymond F. Lippitt, Reg. No. 17,519  
G. Lloyd Knight, Reg. No. 17,698  
George M. Sirilla, Reg. No. 18,221  
Carl G. Love, Reg. No. 18,781  
Kevin E. Joyce, Reg. No. 20,508  
Edgar H. Martin, Reg. No. 20,534  
David W. Brinkman, Reg. No. 20,817  
William K. West, Jr., Reg. No. 22,057  
Edward M. Prince, Reg. No. 22,429  
G. Paul Edgell, Reg. No. 24,238  
Donald J. Bird, Reg. No. 25,323  
Peter W. Gowdey, Reg. No. 25,872  
W. Warren Taltavull, Reg. No. 26,647  
Richard H. Zaitlen, Reg. No. 27,248  
Glenn J. Perry, Reg. No. 28,458

Dale S. Lazar, Reg. No. 28,872  
Kendrew H. Colton, Reg. No. 30,368  
Mark G. Paulson, Reg. No. 30,793  
Barry L. Grossman, Reg. No. 30,844  
John P. Moran, Reg. No. 30,906  
Paul E. White, Jr., Reg. No. 31,097  
Roger R. Wise, Reg. No. 31,204  
Stephen C. Glazier, Reg. No. 31,361  
Paul F. McQuade, Reg. No. 31,542  
Jeffrey A. Simenauer, Reg. No. 31,933  
Michelle N. Lester, Reg. No. 32,331  
David A. Jakopin, Reg. No. 32,995  
Timothy J. Klima, Reg. No. 34,852  
Paul H. Kovelman, Reg. No. 35,228  
Lynn E. Eccleston, Reg. No. 35,861  
Paul G. Nagy, Reg. No. 37,896  
Stephen Bongini, Reg. No. 40,917

05/20/97 10:27:39

4708025

## Send correspondence to:

Roger R. Wise

Pillsbury Madison &amp; Sutro, LLP

725 South Figueroa Street, Suite 1200

Los Angeles, CA 90017-5443

## DIRECT TELEPHONE CALLS TO:

(213) 488-7584 (direct line)

(213) 488-7100 (general line)

|   |  |                       |                      |             |                              |                           |
|---|--|-----------------------|----------------------|-------------|------------------------------|---------------------------|
| 1 | Name of Inventor   | LAST NAME<br>YOSHIOKA | FIRST NAME<br>YASUO  | MIDDLE NAME | Residence: CITY<br>Hamamatsu | STATE or COUNTRY<br>Japan |
|   | Post Office Address c/o Yamana Corporation, 10-1, Nakazawa-cho<br>Hamamatsu-shi, Shizuoka-ken, Japan |                       |                      |             |                              | CITIZENSHIP<br>Japan      |
| 2 | Name of Inventor   | LAST NAME<br>SERRA    | FIRST NAME<br>XAVIER | MIDDLE NAME | Residence: CITY<br>Barcelona | STATE or COUNTRY<br>Spain |
|   | Post Office Address Biscaia 19, 2-2, 08440 Cardedeu, Barcelona, Spain                                |                       |                      |             |                              | CITIZENSHIP<br>Spain      |
| 3 | Name of Inventor   | LAST NAME             | FIRST NAME           | MIDDLE NAME | Residence: CITY              | STATE or COUNTRY          |
|   | Post Office Address  |                       |                      |             |                              | CITIZENSHIP               |
| 4 | Name of Inventor   | LAST NAME             | FIRST NAME           | MIDDLE NAME | Residence: CITY              | STATE or COUNTRY          |
|   | Post Office Address  |                       |                      |             |                              | CITIZENSHIP               |
| 5 | Name of Inventor   | LAST NAME             | FIRST NAME           | MIDDLE NAME | Residence: CITY              | STATE or COUNTRY          |
|   | Post Office Address  |                       |                      |             |                              | CITIZENSHIP               |
| 6 | Name of Inventor   | LAST NAME             | FIRST NAME           | MIDDLE NAME | Residence: CITY              | STATE or COUNTRY          |
|   | Post Office Address  |                       |                      |             |                              | CITIZENSHIP               |

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

|  |   |
|--|---|
| SIGNATURE OF INVENTOR 1<br><i>Yasuo Yoshioka</i> | SIGNATURE OF INVENTOR 2<br><i>[Signature]</i> |
| DATE: <i>1998 Oct. 20</i>                        | DATE: <i>10/11/98</i>                         |
| SIGNATURE OF INVENTOR 3                          | SIGNATURE OF INVENTOR 4                       |
| DATE:  | DATE:   |
| SIGNATURE OF INVENTOR 5                          | SIGNATURE OF INVENTOR 6                       |
| DATE:  | DATE:   |

09 OCT 1998